

## INSTALLATION INSTRUCTION

### SOLAR LED TRI-PROOF TUBE CCT CHANGEABLE

#### TECHNICAL DATA

Model No/SKU:	VT-120018/SKU 6500
Lumens	3000K - 920lm 4000K - 950lm 6400K - 1000lm
Solar Panel	DC 6V, 25W
Battery Capacity	Li-ion 3.7V/18,000 mAh
Charging time	4-6 Hours
Working time	8-10 Hours
CRI/Ra	>80
Beam Angle:	120°
Color:	3 IN 1 (CCT CHANGEABLE)



#### TECHNICAL DATA (SOLAR PANEL)

Voltage (Vmp)	6V
Power (Max)	25W
Current (Max)	4.16A
Open Circuit Voltage (VoC)	7.2V
Short Circuit Current (Isc)	3.47A
Max System Voltage	1000V
Wire Length	5M



#### INTRODUCTION & WARRANTY

Thank you for selecting and buying V-TAC product. V-TAC will serve you the best. Please read these instructions carefully before starting the installation and keep this manual handy for future reference. If you have any another query, please contact our dealer or local vendor from whom you have purchased the product. They are trained and ready to serve you at the best. The warranty is valid for 2 years from the date of purchase. The warranty does not apply to damage caused by incorrect installation or abnormal wear and tear. The company gives no warranty against damage to any surface due to incorrect removal and installation of the product. This product is warranted for manufacturing defects only.

#### WARNING!

1. Installation must be performed by a qualified electrician
2. Keep away from the fire.
3. Don't immerse in the water
4. Luminaire cannot be installed in low-lying areas, so as not to soak.




This marking indicates that this product should not be disposed of with other household wastes.




#### MULTI-LANGUAGE MANUAL QR CODE

Please scan the QR code to access the manual in multiple languages.

#### PARTS INCLUDED

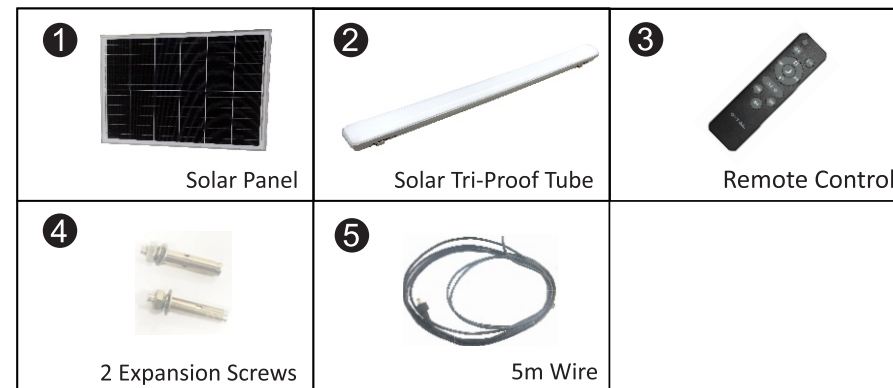


#### REMOTE CONTROL FUNCTION

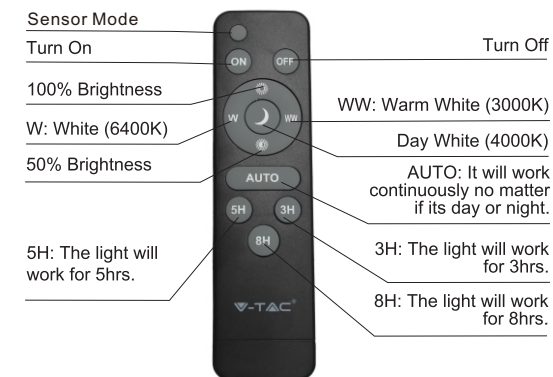

#### MOTION SENSOR MODE




—To activate motion sensor mode, press button on the remote.  
—Automatically turns to 100% brightness when motion is detected in range of 8-10 meters and then turn to 10% brightness in 30-40 seconds of no motion.




Note: To deactivate motions sensor mode, press on the remote.

#### TRI-PROOF TUBE INSTALLATION

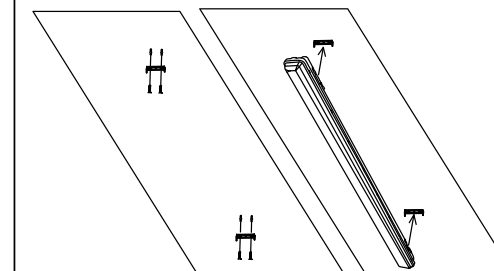

#### SOLAR PANEL INSTALLATION



#### INSTALLATION GUIDE:

- Before installing please remove all the parts to check if all are in good condition or not.
- Drill hole on the ceiling/ Wall as per the requirement and install brackets.
- Slide the lamp body into the bracket and make sure it is fixed.
- Use 2 expansion screws to fix the solar panel on the roof.
- Plug the male and female plugs and tighten the waterproof cap.
- Please makes sure the solar panel is adjusted in correct angle in order to receive sunlight.
- After installation test the light using the remote control.
- The remote control is designed with an operation distance of 8-10m

#### MAINTENANCE

- Clean the light with a dry, lint-free cloth.
- Check the solar panel for dirt regularly. If dirt or is present remove it to guarantee flawless function of the product.
- Especially during the winter, keep the product free from snow and ice.
- Confirm installation direction is correct
- Confirm no objects blocking the solar panel to receive sunlight.

**NOTE:** The battery must be fully charged before using 3-5 rainy days

**IN CASE OF ANY QUERY/ISSUE WITH THE PRODUCT, PLEASE REACH OUT TO US AT: SUPPORT@V-TAC.EU  
FOR MORE PRODUCTS RANGE, INQUIRY PLEASE CONTACT OUR DISTRIBUTOR OR NEAREST DEALERS.  
V-TAC EUROPE LTD. BULGARIA, PLOVDIV 4000, BUL.L.KARAVELOW 9B**